



Lifestyle Dual Shades

Available in Light Filtering or Room Darkening

1. Installing the no-tools headrail:

Hold the no-tools headrail up against the top of the recess, then push the lever firmly upwards until the rail snaps into place. If the rail is not quite tight enough then this can be easily adjusted:


At the end of the rail opposite to the lever there is an adjustment block that allows you to fine-tune the fitting of the rail. Use a flat-head screwdriver to twist the small red plugs in toward the center of the rail. Slide the block out of the rail by a few millimeters, then twist the red plugs back into their original position to fix the block in place. **Make small adjustments only**, repeating as necessary for a tight fit.

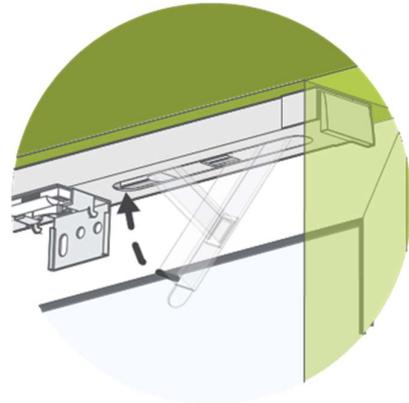

2. Fitting the shade.

Hold the cassette tilted slightly forward but parallel to the brackets making sure that the back panel of cassette sits on the back hooks of the brackets. While putting slight pressure to keep the cassette in the bottom hooks, push it forward until the locking mechanism clicks.

Attention: After the locking mechanism clicks, you will see the front hooks of the brackets slightly on the top of the cassette.

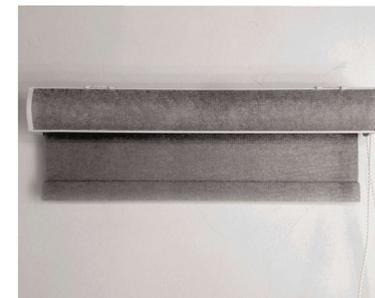

Warning!

Please don't let the front hooks of cassette lock into the front top edge of the cassette first, as this will make it impossible to install.

3. Operating the blind.

To operate the continuous cord loop lift system, simply pull the beaded chain to lower or raise to the desired height. The beaded chain may be on the right-hand or left-hand side depending on what you chose when ordering. Please see motorization manual if you purchased a motorization with remote lift system.

*Please retain these instructions for future reference
Thank you for purchasing this product. Please read the instructions and warning carefully before installation.*